
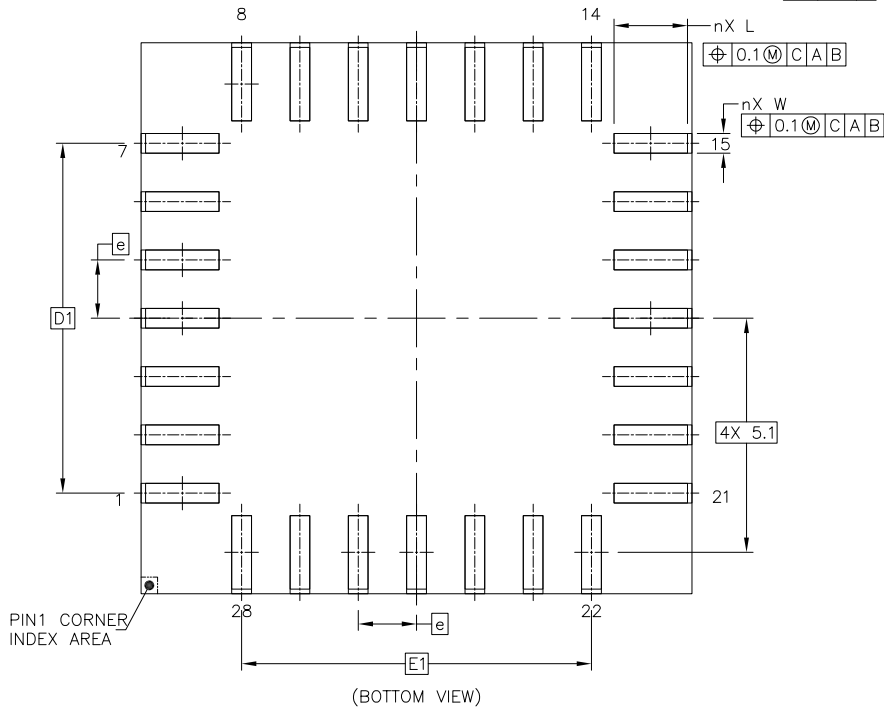
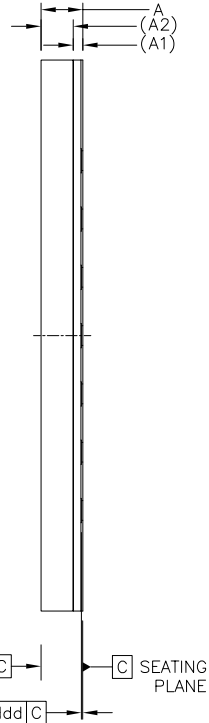


PIN1 CORNER
INDEX AREA

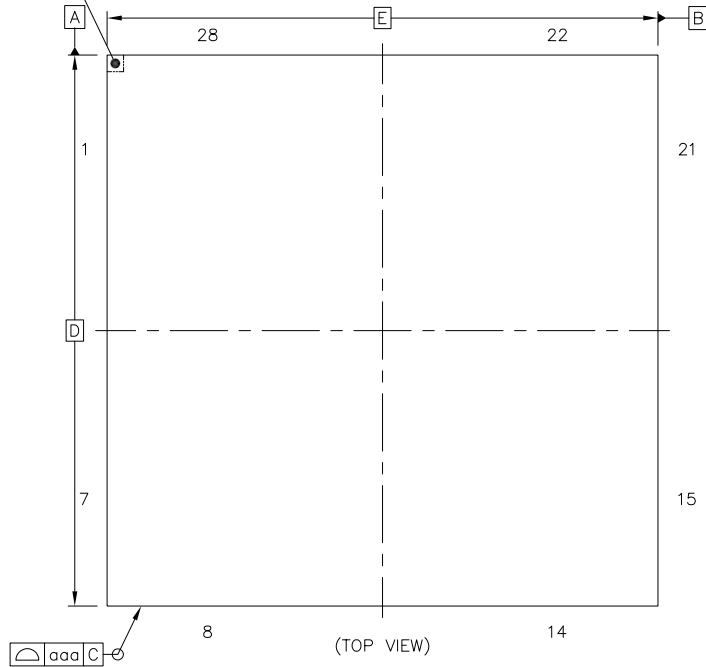

	SYMBOL	COMMON DIMENSIONS		
		MIN.	NOR.	MAX.
TOTAL THICKNESS	A	---	---	1
SUBSTRATE THICKNESS	A1	0.21		REF
MOLD THICKNESS	A2	0.7		REF
BODY SIZE	D	12		BSC
	E	12		BSC
LEAD WIDTH	W	0.38	0.43	0.48
LEAD LENGTH	L	1.55	1.6	1.65
LEAD PITCH	e	1.27 BSC		
LEAD COUNT	n	28		
EDGE LEAD CENTER TO CENTER	D1	7.62		BSC
	E1	7.62		BSC
BODY CENTER TO CONTACT LEAD	SD	---		BSC
	SE	---		BSC
PRE-SOLDER		---	---	---
PACKAGE EDGE TOLERANCE	aaa	0.1		
MOLD FLATNESS	bbb	0.1		
COPLANARITY	ddd	0.08		

NOTES:

△ PARALLELISM MEASUREMENT SHALL EXCLUDE ANY EFFECT OF MARK ON TOP SURFACE OF PACKAGE.

TITLE		DWG. NO.	REV.
PACKAGE OUTLINE 28 LD LGA 12 X 12 X 1 MM 1.27 PITCH		98A0028LG015	001
		SHEET	SIZE
		1 OF 2	A4
UNIT	DIMENSION AND TOLERANCES	REFERENCE DOCUMENT	
MM	ASME Y14.5M	---	

